


BI.ACTIVE.IMPULSE.SEALER

SPB (Bi-Active Impulse Sealing Type)

- Clean Room Compatible
- Works with all popular moisture barrier bag materials
- Easy to operate
- Practically maintenance free
- One Touch Seal Control
- Bi-Active Impulse Sealing for Gusset Pouch and Retort Packing

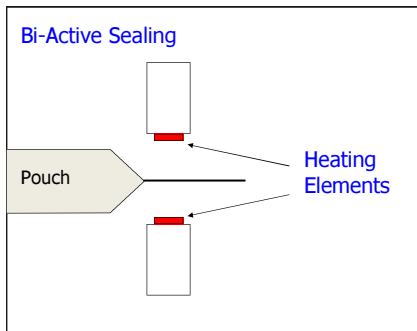

Hands Free Operation provides faster and accurate impulse sealing. High Performance Impulse Sealing System to meet different daily operation.

Standard Features:



- Easy set-up using only a standard electrical outlet
- Object / Finger Anti Clamp Safety System
- Sealing and Cooling System
- Adjustable sealing time
- Easy Heating Element change-over
- Easy Teflon sheet replacement
- Height adjustable working platform

Applications:

- Moisture resistance sealing
- Ideal for Retort Pouch Sealing
- Extend storage period for packed goods.
- Pouch Materials = Moisture Barrier Bags, Aluminum Foil, OPP Films, Nylon, HDPE, LDPE, Laminated Films.

Optional Upgrade:

- 10mm Sealing
- Digital Timers System
- Stainless Steel Chassis
- Machine Stand

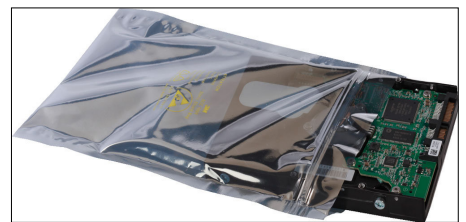

S P E C I F I C A T I O N S

Model:	SPB-400	SPB-600	SPB-800	SPB-1000
Seal Size:	(L) 400 mm x (W) 5 mm	(L) 600 mm x (W) 5 mm	(L) 800 mm x (W) 5 mm	(L) 1000 mm x (W) 5 mm
Machine Dimensions (mm):	(L) 450 x (W) 500 x (H) 400	(L) 650 x (W) 500 x (H) 400	(L) 850 x (W) 500 x (H) 400	(L) 1050 x (W) 500 x (H) 400
Power:	1Φ, 230V, 50Hz	1Φ, 230V, 50Hz	1Φ, 230V, 50Hz	1Φ, 230V, 50Hz
Impulse Power:	1200 W	1400 W	1600 W	1800 W
Compressed Air:	Minimum 5 bars	Minimum 5 bars	Minimum 5 bars	Minimum 5 bars



KITA PACKAGING SDN. BHD.

6537-6538, Jalan Raja Uda, 12300 Butterworth, P.W., Penang, Malaysia.

Tel: (604) 331-3487, 331-2201, 332-3908 Fax: (604) 332-3177

Website: <http://www.kitapackaging.com> Email: info@kitapackaging.com