


TABLE.TOP.CONSTANT.HEAT.SEALER

MPD (Direct Heat Type)

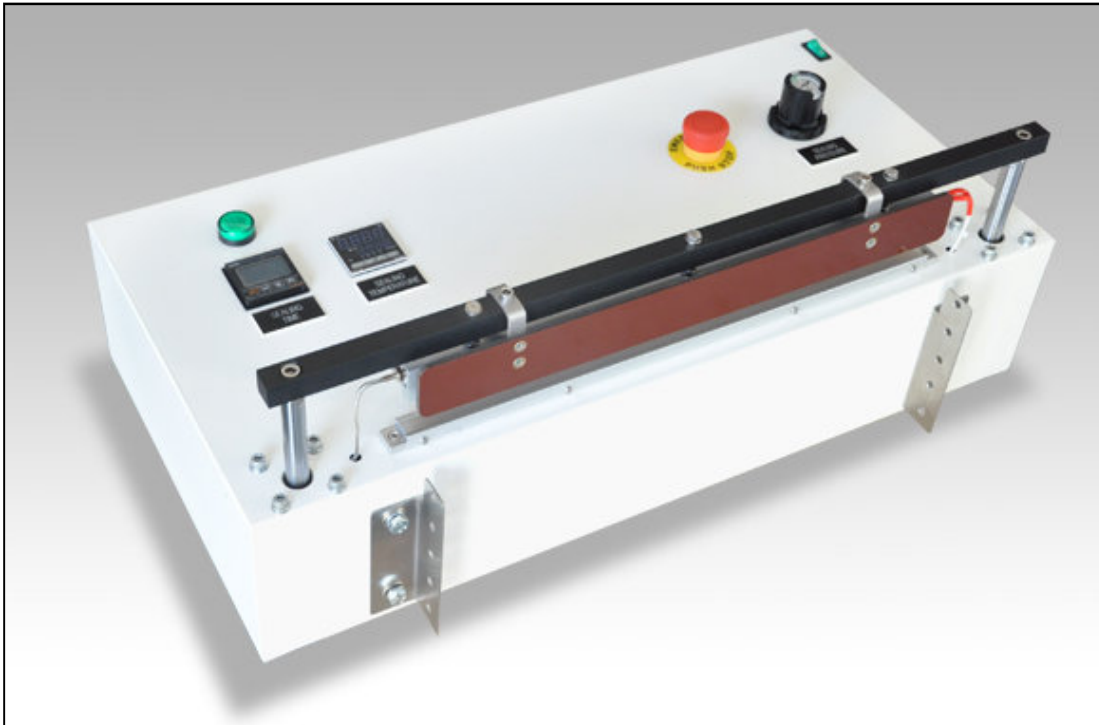

MPD Series Table Top Heat Sealer is pneumatically operated and available in 400mm, 500mm or 600mm seal length. A variable timer and pressure regulator ensure precise control over the amount of time heat and seal pressure is applied to your package. With an outstanding level of heat sealing control system you can have confidence in sealing a wide range of materials including most medical Tyvek pouch and laminated foils.

- Clean Room Compatible
- Works with all popular microbial & moisture barrier bag materials
- Easy to operate
- Practically maintenance free
- Foot Pedal Switch Operated

Standard Features:

- Direct Heat Sealing System
- Digital Temperature Controller
- Adjustable Sealing Pressure
- Finger / Object Anti-Pinch Safety System

Applications:

- Medical packaging industry
- Extend storage period for packed goods.
- Pouch Materials = Tyvek medical microbial barrier products, Aluminum Foil, OPP Films, Nylon, Laminated Films.

Optional Upgrade:

- Digital Timers
- Fully Stainless Steel
- Computer Data Acquisition System (CDAS)

S P E C I F I C A T I O N S

Model:	MPD-400	MPD-500	MPD-600
Seal Size:	(L) 400 mm x (W) 10 mm	(L) 500 mm x (W) 10 mm	(L) 600 mm x (W) 10 mm
Machine Dimensions (mm):	(L) 700 x (W) 350 x (H) 250	(L) 800 x (W) 350 x (H) 250	(L) 900 x (W) 350 x (H) 250
Power:	1Φ, 230V, 50Hz	1Φ, 230V, 50Hz	1Φ, 230V, 50Hz
Power Rating:	600 W	700 W	800 W
Air Requirement:	Minimum 5 bars	Minimum 5 bars	Minimum 5 bars



KITA PACKAGING SDN. BHD.

6537-6538, Jalan Raja Uda, 12300 Butterworth, P.W., Penang, Malaysia.
 Tel: (604) 331-3487, 331-2201, 332-3908 Fax: (604) 332-3177

Website: <http://www.kitapackaging.com> Email: info@kitapackaging.com