

# BI.ACTIVE.VERTICAL.IMPULSE.SEALER

## SVB (Bi-Active Impulse Sealing Type)

Hands Free Operation provides faster and accurate impulse sealing. High Performance Impulse Sealing System to meet different daily operation.

- Clean Room Compatible
- Works with all popular moisture barrier bag materials
- Easy to operate
- Practically maintenance free
- One Touch Seal Control
- Bi-Active Impulse Sealing for Gusset Pouch and Retort Packing

### Standard Features:




- Easy set-up using only a standard electrical outlet
- Object / Finger Anti Clamp Safety System
- Sealing and Cooling System
- Adjustable sealing time
- Easy Heating Element change-over
- Easy Teflon sheet replacement
- Height adjustable working platform

### Optional Upgrade:

- 10mm Sealing
- Digital Timers System
- Stainless Steel Chassis
- Machine Stand
- Other Sealing Length

### Applications:

- Moisture resistance sealing
- Ideal for Retort Pouch Sealing
- Extend storage period for packed goods.
- Pouch Materials = Moisture Barrier Bags, Aluminum Foil, OPP Films, Nylon, HDPE, LDPE, Laminated Films.

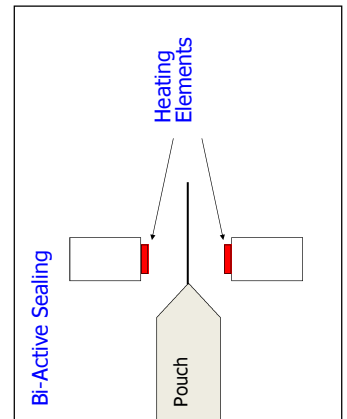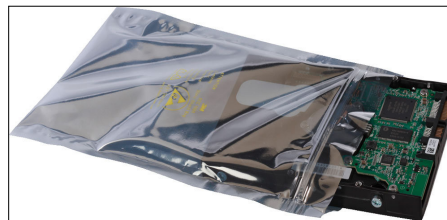

## SPECIFICATIONS

Model:	SVB-600	SVB-800	SVB-1000	SVB-1200
Seal Size:	(L) 600 mm x (W) 5 mm	(L) 800 mm x (W) 5 mm	(L) 1000 mm x (W) 5 mm	(L) 1200 mm x (W) 5 mm
Machine Dimensions (mm):	(L) 800 x (W) 915 x (H) 1400	(L) 1000 x (W) 915 x (H) 1400	(L) 1200 x (W) 915 x (H) 1400	(L) 1400 x (W) 915 x (H) 1400
Power:			1Φ, 230V, 50Hz	
Impulse Power:	2000 W	2200 W	2500 W	2800 W
Compressed Air:			Minimum 5 bars	



## KITA PACKAGING SDN. BHD.

6537-6538, Jalan Raja Uda, 12300 Butterworth, P.W., Penang, Malaysia.

Tel: (604) 331-3487, 331-2201, 332-3908 Fax: (604) 332-3177

Website: <http://www.kitapackaging.com> Email: [info@kitapackaging.com](mailto:info@kitapackaging.com)