
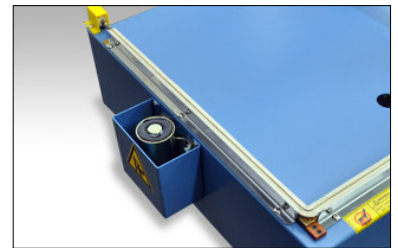


MANUAL.L-TYPE.SEALER.MAGNETIC.LATCHING

LM Series

LM Series Manual L-Type Sealer suitable for small to medium output requirements. Single piece Teflon band ribbon with round corner seal reduces dog ears. Will seal center folded PVC or polyolefin shrink films with no smoke or residue. Pin wheel hole punch. Easy load film rack.

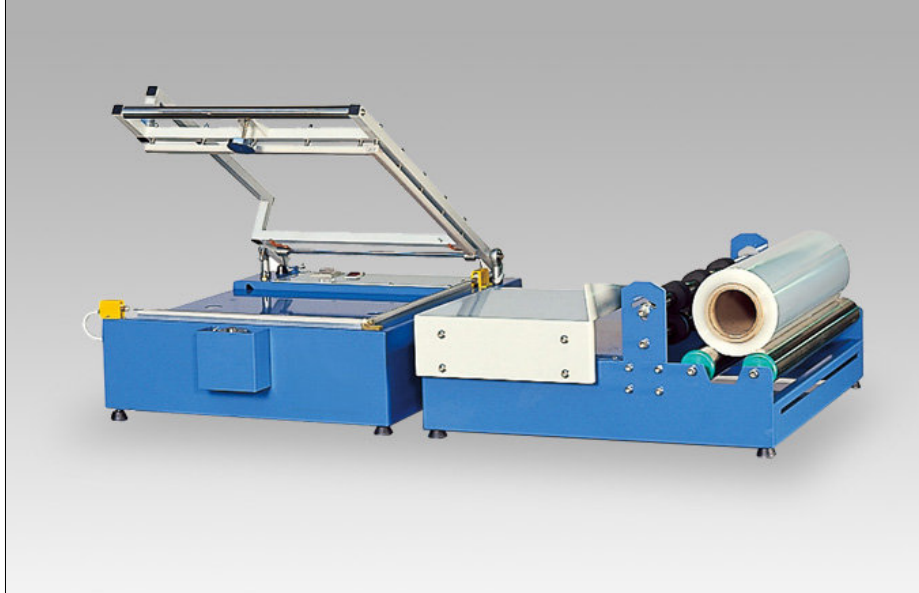

The single electro-magnet timed latching system used in combination with the Impulse Sealing System delivers consistent jaw pressure and identical seals time after time. It is possible to wrap almost all shapes of product in an fully sealed film wrap. This seal system works well with all shrink films to consistently deliver superior strength seals and reduce maintenance costs.

Features:

- Single Electro-Magnetic Hold Down
- Flat Type Silicone Cushion
- Impulse Sealing
- Blade Type Heating Element
- Adjustable Product Platform Height
- Adjustable Sealing Time
- Adjustable Working Surface
- Easy Sealing Element and Teflon Tape replacement

Applications:

- Electronics
- Medical Products
- Frozen Food
- Wholesale Trade
- General Merchandise
- Publishing / Printing

Shrinkable Films: PVC, Polyolefin



Model Selection:

- Standard Machine = LM-XXT
- Stainless Steel Body and Stand = LM-XXT-S

S P E C I F I C A T I O N S

Model:	LM-18T	LM-24T
Seal Size:	(L) 450 mm x (W) 450 mm	(L) 600 mm x (W) 600 mm
Machine Dimensions (mm):	(L) 1200 x (W) 750 x (H) 360	(L) 1500 x (W) 900 x (H) 360
Maximum Product Size (mm):	(L) 400 x (W) 400 x (H) 120	(L) 550 x (W) 550 x (H) 120
Power:	1Φ, 230V, 50Hz, 1.9kW	1Φ, 230V, 50Hz, 2.4kW



KITA PACKAGING SDN. BHD.

6537-6538, Jalan Raja Uda, 12300 Butterworth, P.W., Penang, Malaysia.

Tel: (604) 331-3487, 331-2201, 332-3908 Fax: (604) 332-3177

Website: <http://www.kitapackaging.com> Email: info@kitapackaging.com